



MASTERSPEED

DC SERVODRIVE



MASTERSPEED® (MTS)

Stand alone; four quadrant bidirectional servodrives for controlling DC Servomotors up to 15 Nm (2142.8 oz.-in.)

Typical applications are :
 Medical Equipment, Milling Machines, Conveyors,
 Packaging Equipment, Storage Systems,
 Printing Machines, Feeders, Textile Equipment.

STANDARD FEATURES

- ✓ Internal power supply and dumping circuit
- ✓ Ventilation on board when required
- ✓ Surface Mount Tecnology
- ✓ IGBT or POWER MOSFET bridge
- ✓ Removable power module
- ✓ High industrialization
- ✓ Torque mode
- ✓ Tachogenerator feedback
- ✓ Armature feedback

OPTIONS

- ✓ Encoder feedback
- ✓ External dumping resistor (P=400, 800W)

SPECIFICATIONS

- ✓ Supply voltage range
 - (MTS60) 22÷44 Vac
 - (MTS140) 30÷95 Vac
 - (MTS200) 45÷145 Vac
- ✓ Output voltage 1.35xVac Supply
- ✓ Input reference (differential) ±10Vdc
- ✓ Input-output demand current ±10Vdc
- ✓ Out. voltage for external use +10/-10Vdc@2.5 mA
- ✓ Enable signals +10÷30Vdc
- ✓ PWM frequency 20 KHz
- ✓ Motor current monitor ±7.5 VDC (at peak current)
- ✓ Humidity (without condensation) 10÷95 (%)
- ✓ Operating temperature 0÷40°C (32÷104°F)



DESCRIPTION

The Masterspeed® Servodrive comes complete with its own power supply, regenerative circuit and with detachable plug-in terminals for easy installation. The modular line makes the Masterspeed® the ideal solution for 1 to 3 axis applications. If required, fan cooling is incorporated into each amplifier module. Usually, the external choke isn't required.

ACCESSORIES

(see specific data sheets for details)



- ✓ SERVOMOTORS
 - Sax 100: 0.045÷2.7Nm (6.4÷386 oz.-in.)
 - Sax 350: 0.7÷1.8Nm (100÷257 oz.-in.)
 - Sax 500: 2.8÷8Nm (400÷1143 oz.-in.)
 - Sax 700: 0.1÷8Nm (14÷1143 oz.-in.)
- ✓ GEARBOXES
 - Rex 100: 5 flange sizes, R ratios 1/3÷1/216
- ✓ TRANSFORMERS
 - TM/TT: single/3ph, 100÷8000 VA
- ✓ NET FILTERS (for CE compliance)
 - FRM/FRT: single/3ph, 2÷16 Arms

MODEL	MTS 60						MTS 140						MTS 200					
	4/8	8/16	10/20	14/28	20/40	25/50	4/8	8/16	10/20	14/28	20/40	25/50	4/8	8/16	10/20	14/28	20/40	25/50
Rated Current (A _{dc})	4	8	10	14	20	25	4	8	10	14	20	25	4	8	10	14	20	25
Peak Current (A _{dc}) x 2 sec.	8	16	20	28	40*	50*	8	16	20	28	40*	50*	8	16	20	28	40*	50*
F2: Supply Line Fuses (T-type = time-lag)	4 250 V	8 A 250 V	10 A 250 V	14 A 250 V	20 A 250 V	25 A 250 V	4 A 250 V	8 A 250 V	10 A 250 V	14 A 250 V	20 A 250 V	25 A 250 V	4 A 250 V	8 A 250 V	10 A 250 V	14 A 250 V	20 A 250 V	25 A 250 V
Supply (VAC) (3PH)	44 Vac ▲						95 Vac ▲						145 Vac ▲					

▲: Recommended AC power supply * : Peak current= x 1 second

Part number D.S./09.00/MTS/01

Drawings are not to scale (see quotations)

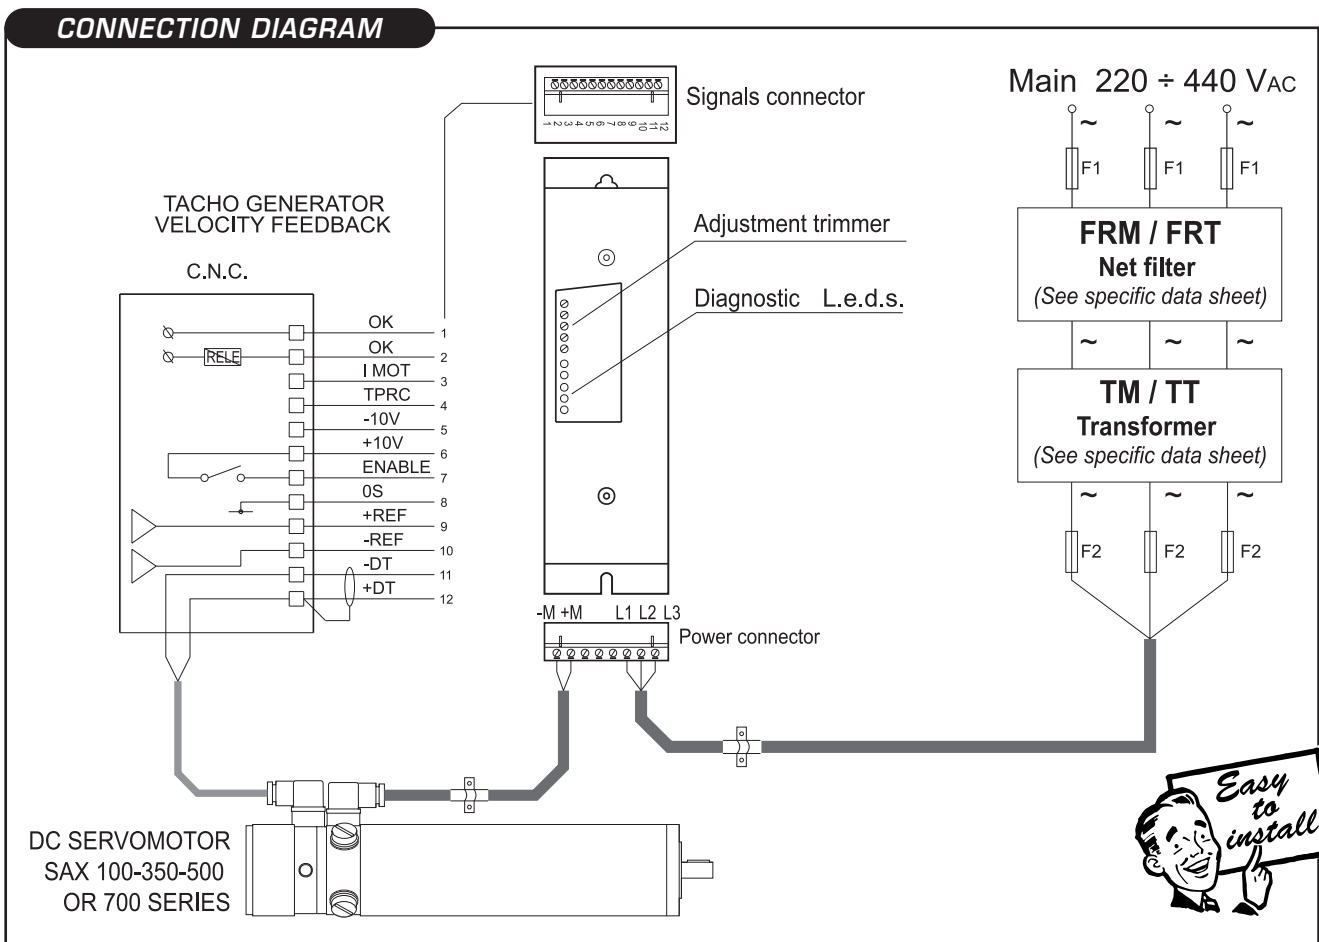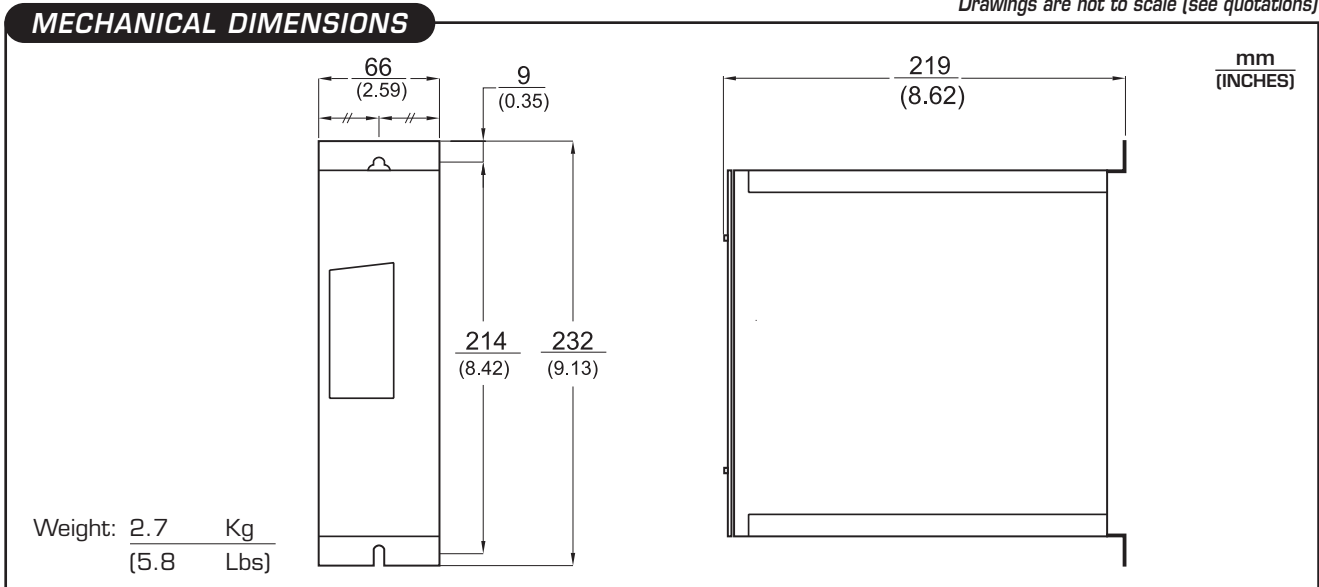

Specifications subject to change without notice. This document has been carefully checked. However, Axor does not assume any liability for errors or inaccuracies.

© COPYRIGHT 2000 AXOR INDUSTRIES. All rights reserved. Printed in Italy, 09/00

ORDERING CODE

Example:

NAME: Dc Servodrive

AMPLIFIER TYPE: 060 - 140 - 200

SIZE: 04/08 - 08/16 - 10/20 - 14/28 - 20/40 - 25/50

DUMPING SIZE:

RX = internal standard resistors

R4 = 400W external resistors (optional)

R8 = 800W external resistors (optional)

MTS - 200 - 10/20 - RX - S - 1000 / TO - RD

AXOR
adjustment
identification number

PROTECTION:
S = Standard
T = Tropicalized

CONTROL MODE:
RD = Differential reference
IO = Demand Current
(torque mode)
PD = PWM+DIR (optional)

FEEDBACK:
TO = Tachogenerator (DC)
AO = Armature
EO = Encoder (optional)



AXOR IND.

via Cà Sordis 6/g - 36054 Montebello Vic.no - Vicenza - Italy

phone: (8 l. n.a.) (+39) 0444 440441 - (+39) 0444 440988

fax: (+39) 0444 440418



OFFICIAL-DEALER